



# Moneris<sup>®</sup> Go Terminal (Victa) Integrated.

## Getting Started Guide

Documentation Version: 1.1.0  
Documentation Date: May 14, 2026

Copyright © Moneris Solutions, 2026  
All rights reserved. No part of this publication may be reproduced, stored in retrieval systems, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Moneris Solutions Corporation.

# Contents

- Document Control .....3**
- Introduction.....4**
  - Before getting started ..... 4
- Moneris Go Terminal box content.....6**
- Installing the Hardware.....7**
  - Diagram of the front of the Moneris Go Terminal ..... 7
  - Connecting the charger to the Moneris Go Terminal..... 8
  - Connecting the optional charging or communication base to the Moneris Go Terminal..... 9
- Communication .....10**
  - Preparing your firewall (Wi-Fi communication) ..... 10
  - Enabling Wi-Fi ..... 10
  - Configuring the Moneris Go Integrated App ..... 11
  - Open the Launcher Application ..... 11
  - Configure Cloud and Direct ..... 14
  - Accessing Integrated app settings ..... 19
  - Exit the Integrated app ..... 22
- Maintenance and Care .....24**
  - Power off the terminal ..... 24
  - Restart the terminal ..... 24
  - Terminal Care and Cleaning..... 25
- Troubleshooting .....26**
- Merchant and Integrator Support.....27**

## Document Control

Rev.	Date	Section	Summary of changes
1.0.0	March 6, 2026	All sections	Initial release
1.1.0	May 14, 2026	All sections	Formatting and screen updates

## Introduction

The Moneris Go Terminal is a smart solution with cloud integration intended for your point-of-sale application. Key features include:

- PCI security for card entry (PCI PTS v6)
- Multiple card readers:
  - integrated magnetic stripe
  - integrated chip
  - digital wallet
  - embedded contactless reader
- Front camera (auto focus, barcode/QR scanning, 5MP)
- Bottom camera (fixed focus, barcode/QR scanning, 2MP)
- Cellular, Wi-Fi and Bluetooth (4G LTE)
- 6.7-inch (17 cm) HD IPS capacitive display
- 3.5 mm audio jack
- Thermal receipt printer

Use this guide to:

- Set up the hardware
- Configure the application and communication settings
- Synchronize the terminal with the Moneris host
- Troubleshoot if needed

## Before getting started

Make sure you have received these items:

- Hardware
- A set of Moneris test cards  
*Note: Not applicable for production - QA only*
- Account credentials for test or production including:
  - Merchant ID
  - Terminal ID
- Ensure to have a Go Portal account for test or production (refer to **Go Portal** account creation). Without this account, the user will not be able to set up the terminal.



For National customers please refer to your Client Consultant.

<b>Environment</b>	<b>Account credentials</b>
<b>Test</b>	<ul style="list-style-type: none"><li>▪ Merchant ID (MID) consisting of 13 numeric digits beginning with 0030</li><li>▪ Associated Store ID (alphanumeric, typically beginning with mogo- or gwca-)</li><li>▪ Terminal ID (TID) consisting of 8 characters beginning with A7</li></ul>
The merchants are expected to work with the Client Consultant.	

<b>Environment</b>	<b>Account credentials</b>
<b>Production</b>	<ul style="list-style-type: none"><li>▪ Merchant ID (MID) consisting of 13 numeric digits beginning with 0030</li><li>▪ Associated Store ID (alphanumeric, typically beginning with mogo- or gwca-)</li><li>▪ Moneris terminal ID consisting of 8 characters beginning with A7</li></ul>
The merchants are expected to work with their Moneris Service Manager.	





If anything is missing, contact your **Moneris Client Consultant** for assistance with ordering equipment and setting up the related test account(s).

## Moneris Go Terminal box content

Make sure you have received all the hardware required to install the Moneris Go Terminal.

Ensure to only use cables provided by Moneris.

The box includes:

Item	Description
	Integrated terminal
	USB Charging cable and adaptor
	Optional charging & communication base
	Receipt paper

## Installing the Hardware

Get to know your Moneris Go terminal and follow steps to connect the charger or the optional charging base.

### Diagram of the front of the Moneris Go Terminal

Use this diagram to get familiar with the interfaces and ports located in the front of the Moneris Go Terminal.







Label	Hardware Element	Function
A	Printer	Prints receipts and reports.
B	Front Camera	Takes selfie style pictures.
C	Volume control	Increases or decreases the audio of the terminal.
D	Camera and Barcode Scanner	Scans QR codes on a receipt to help you find a transaction to refund, void, or reprint receipts and able to take pictures.
E	Contactless reader	Reads card information when a card is tapped.
F	Magnetic stripe reader	Reads card information when a card is swiped.
G	Chip card reader	Reads card information when a chip card is inserted.

## Connecting the charger to the Moneris Go Terminal

	<ol style="list-style-type: none"><li>1. Un-fold the charging cable and insert the micro-USB connector into the USB port on the right side of the terminal.</li></ol>
	<ol style="list-style-type: none"><li>2. Make sure the AC adaptor is connected to the other end of the charging cable.</li></ol>
	<ol style="list-style-type: none"><li>3. Plug the AC adaptor into a working electrical outlet. <b>Note:</b> Use a power bar to avoid electrical surges.</li></ol>
	<ol style="list-style-type: none"><li>4. The terminal displays the charging screen.<ol style="list-style-type: none"><li>a. Wait for the battery icon to display. This indicates that the terminal is receiving power and the battery is charging.</li><li>b. Continue charging the terminal during the rest of the setup procedures.</li></ol></li></ol>

## Connecting the optional charging or communication base to the Moneris Go Terminal

	<ol style="list-style-type: none"><li>1. Unfold the charging cable and insert the USB-C connector into the USB port in the back of the base.</li></ol>
	<ol style="list-style-type: none"><li>2. Connect the other end of the charging cable, which is the USB-A connection to a computer or laptop.  If using a power adaptor, then plug USB-A to a power adaptor then into a working electrical outlet.  <b>Note:</b> Use a power bar to avoid electrical surges.</li></ol>
	<ol style="list-style-type: none"><li>3. Dock the terminal on the base. Ensure that the terminal fits securely over the base.</li></ol>
	<ol style="list-style-type: none"><li>4. The terminal displays the charging screen.<ol style="list-style-type: none"><li>a. This indicates that the terminal is receiving power and the battery is charging.</li><li>b. Continue charging the terminal during the rest of the setup procedures.</li></ol></li></ol>

## Communication

To set up the Moneris Go Terminal, the terminal must have internet access and be able to communicate with Moneris. This is made possible through the included SIM and cellular capabilities. If you wish to use Wi-Fi to connect the Moneris Go Terminal to your network, you can do so during the application setup ([Configuring the Moneris application](#)). Please note, the Moneris Go Terminal supports 2.4GHz and 5GHz band for Wi-Fi.

### Preparing your firewall (Wi-Fi communication)

Please refer to [Merchant Network Readiness Checklist](#) to ensure proper firewall exemptions are in place for terminal communication.



### Enabling Wi-Fi


This section explains how to enable Wi-Fi communication on the Moneris Go Terminal as part of the software configuration. It follows on from the communication settings in [step 4](#). When you tap Wi-Fi in the communication settings, the Android settings appear for Wi-Fi.

You can now enable Wi-Fi and set up static IP if needed.

1. Swipe down from the top of the screen to display the Android settings menu.
2. Tap **Internet**.
3. Tap the **Wi-Fi** toggle to turn it on.
4. Tap the Wi-Fi network you want to connect to.  
***Note:** Tap **FORGET** to deselect the current Wi-Fi network, then select the correct Wi-Fi network.*
5. Enter the password.
6. To configure static IP, follow these steps. Otherwise, skip to step 7.
  - a. Select the gear icon beside the Wi-Fi network name.
  - b. Tap the pencil icon on the top right corner.
  - c. Tap **Advanced options**.
  - d. Tap **DHCP** on the IP settings section.
  - e. Tap **Static**.
  - f. Enter the network parameters.
  - g. Tap **SAVE**.
7. Tap **DONE**.

## Configuring the Moneris Go Integrated App


Follow each section below to configure the Go Integrated application (for Cloud or Direct) and to modify communication settings as needed.

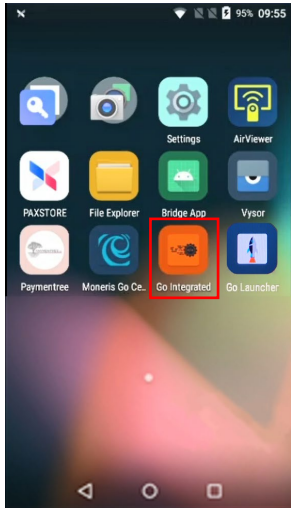


## Open the Launcher Application

Follow the steps below to launch the Go Integrated application (only for Direct and Cloud Integrators).


1. On your terminal, expand the top navigation drawer by swiping on the screen from top to bottom.

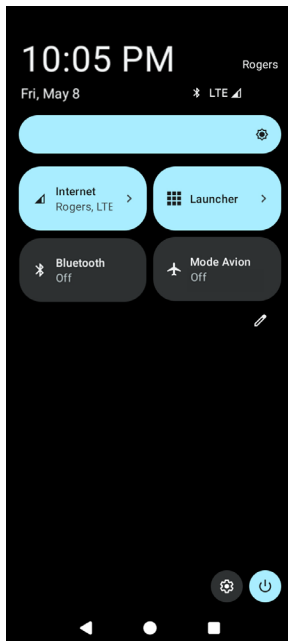


2. Tap on **Launcher**.

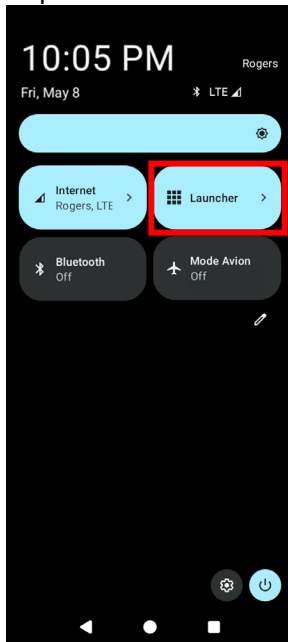


3. The home screen with all applications will appear.

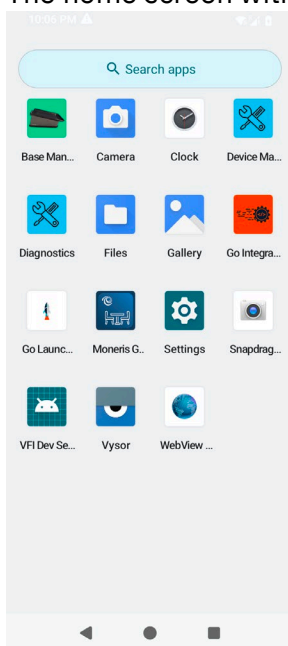


## 4. Tap on **Go Launcher**.

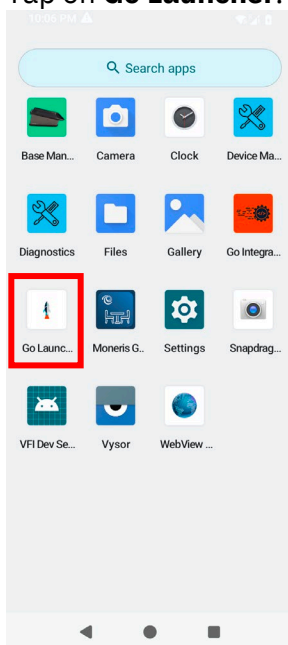

## 5. The Default home app will open.

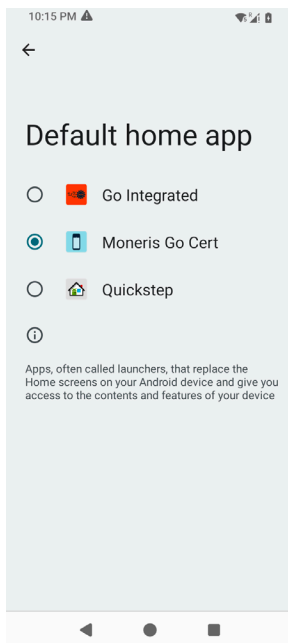


## 6. Tap on **Go Integrated**.

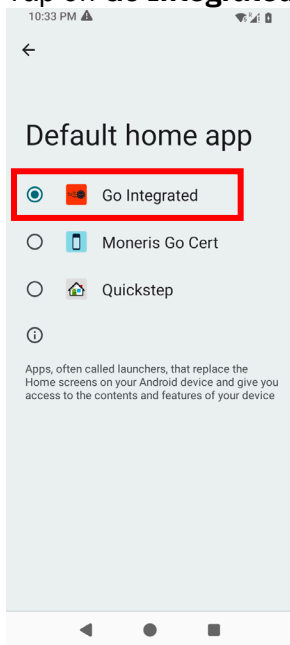

7. Wait while the sync process on your Moneris Go Terminal begins. The Moneris Go Integrated application will launch.  
Proceed to next section.

## Configure Cloud and Direct



1. Tap **Go** to begin configuring your Moneris Go Integrated application.

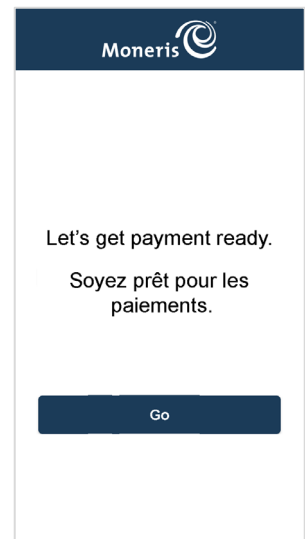

2. Tap **English** or **Français** to select language for the initial integrated setup.

**Note:** This screen is used (by the technician) to setup the language for the initial integrated setup only.

3. Tap **English** or **Français** to select the language for the integrated Moneris Go Terminal to communicate with Moneris.

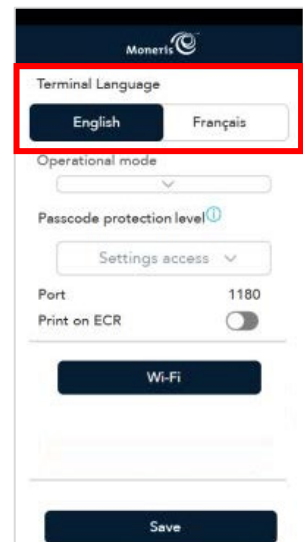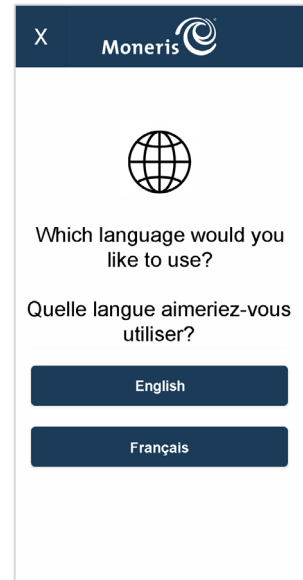

4. Select the communication settings:

- **Operational mode:** Choose between **Direct** or **Cloud**

**Note:** The default option is Disabled.

- **Direct** will display Port default value of 1180

**Note:** An error message is displayed for an invalid Port number between 0 and 1179.

- **Passcode protection level:** Choose between **Settings access** or **Menu access**

- Passcode protection level controls whether a passcode is required to open the menu or the settings screen.

**Note:** The default option is Settings access.

**Note:** If Menu access is selected, you will need to enter a Passcode to exit the application after swiping left on the idle screen.

- **Print on ECR:** Toggle between **On** or **Off**

**Note:** Cardholder choice should be enabled in Receipts settings.

- **On** will not print a physical receipt when cardholder selects print
- **Off** will print a physical receipt when cardholder selects print


**Note:** The ECR will always receive transaction response.

- **Wi-Fi:** Tap **Dynamic** or **Static IP Address** for ECR connection

**Note:** You may need to configure these features in the Android setup then return to this screen to continue.

**Note:** If terminal has internet connection, IP Address will be displayed below in green.

5. Tap **Save** to accept the terminal language and integrated setup configuration.

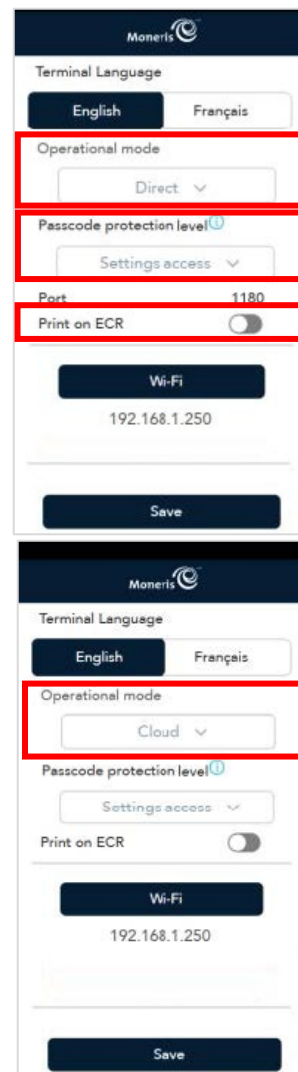

6. Wait while the sync process begins to retrieve the Moneris Merchant ID.

**Note:** *If the sync process is not successful, “Account not activated” message appears to contact Moneris support.*

7. Tap on the **Merchant ID** field.

Enter your Merchant ID number.




**Note:** *0030 is prepopulated in the field.*

**Note:** *You will have only three attempts to enter the Merchant ID.*


Tap **OK** or **checkmark**.

8. Wait while the sync process completes to sync with the Moneris host.


**Note:** *If the sync process is not successful, “Sync with Moneris failed” message appears. Tap **Retry**, or you may need to contact Moneris support.*

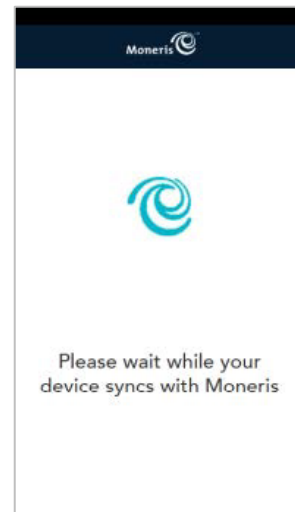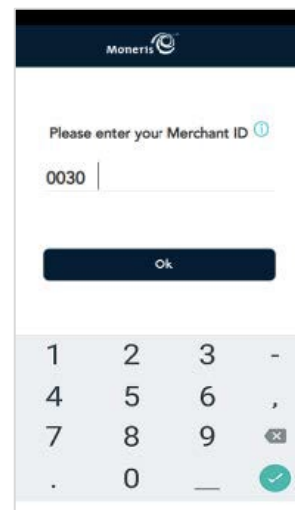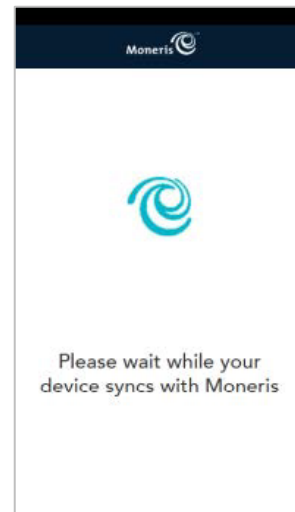

9. Tap **Go** to continue.

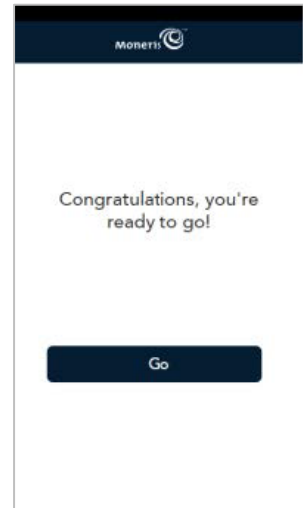


10. The integrated mode idle screen will appear.

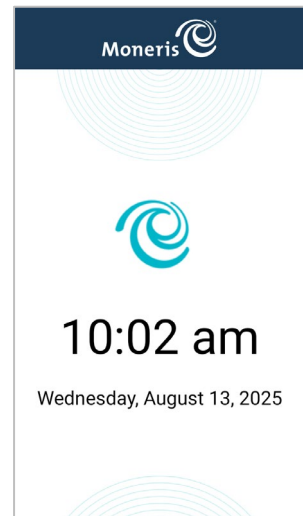

## Accessing Integrated app settings

1. From the idle screen, swipe from left to right.

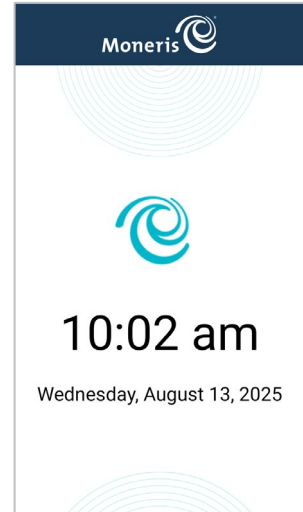

2. This screen will appear if **Menu access** was selected under Passcode Protection Level in the Initial setup.


Tap and enter the default passcode.

- a. For QA: 123456.
- b. For Production passcode please contact Moneris.

**Note:** *Passcodes will be modifiable in Go Portal in a future update.*


- c. Tap **checkmark**.

If **Settings access** was selected under Passcode Protection Level in the Initial Setup, skip to the next step.

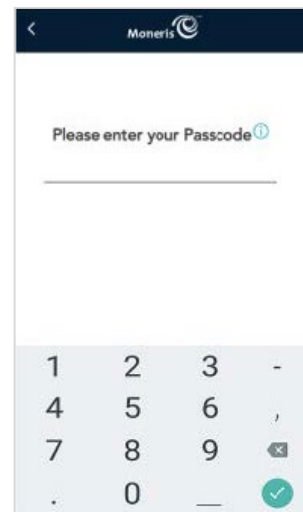

3. Tap **Settings**.

The Settings screen will display.

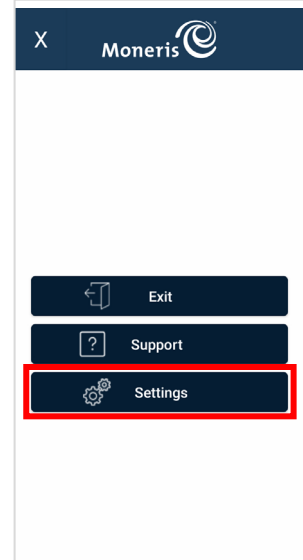

4. This screen will appear if **Settings access** was selected under Passcode Protection Level in the Initial setup.

Tap and enter the default passcode


- a. For QA: 123456
- b. For Production passcode please contact Moneris.

**Note:** *Passcodes will be modifiable in Go Portal in a future update*


- c. Tap **checkmark**.

The Settings screen will display.


If **Menu access** was selected under Passcode Protection Level in the Initial Setup, skip to the next step.

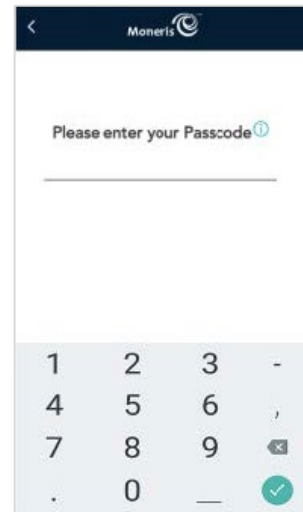

5. Proceed to make applicable changes.
6. Tap **Save** to exit.  
Changes will be saved.

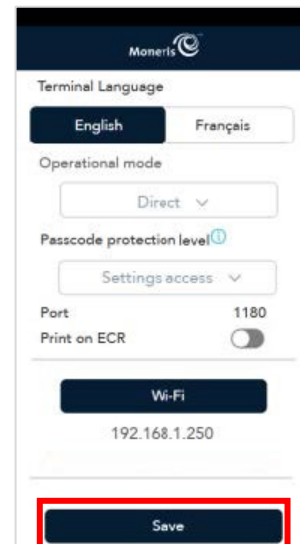


7. The integrated mode idle screen will appear.

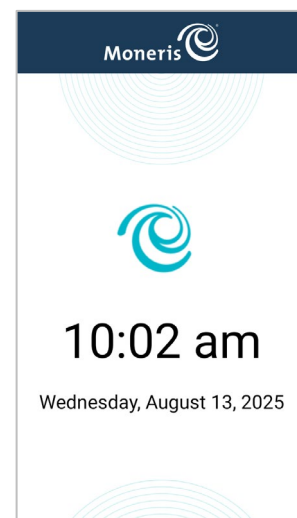

## Exit the Integrated app

1. From the idle screen, swipe from left to right.

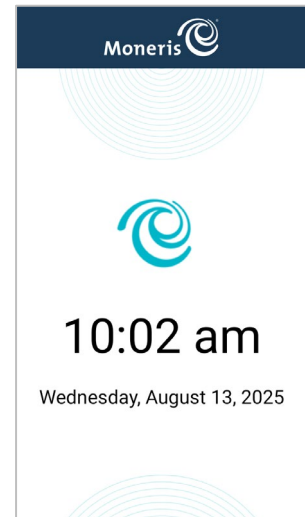

2. This screen will appear if **Menu access** was selected under Passcode Protection Level in the Initial setup.


Tap and enter the default passcode.

- a. For QA: 123456
- b. For Production passcode please contact Moneris

**Note:** *Passcodes will be modifiable in Go Portal in a future update.*


- c. Tap **checkmark**.

If **Settings access** was selected under Passcode Protection Level in the Initial Setup, skip to the next step.

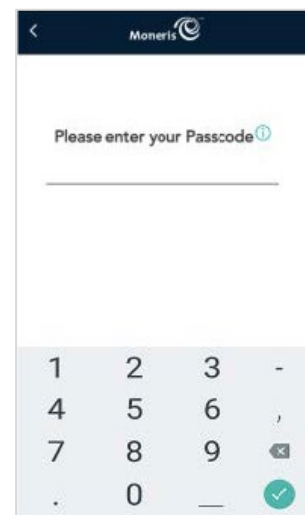

3. Tap **Exit**.


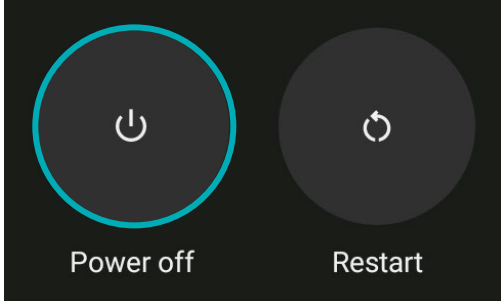
The home screen will display.

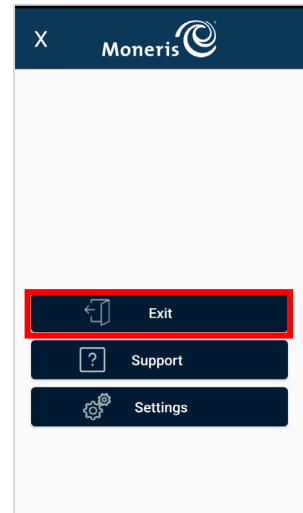


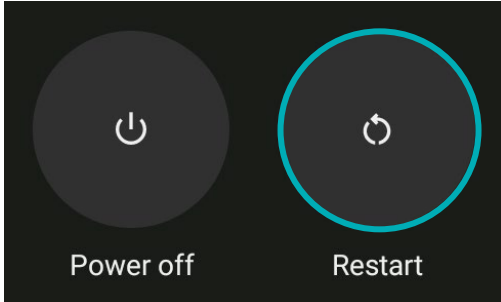
## Maintenance and Care

This section will provide you with instructions for terminal maintenance and care.

### Power off the terminal

	<ol style="list-style-type: none"><li>1. Press and hold the &lt;Power&gt; button on the right side of the terminal for more than 2 seconds until the menu panel appears.</li></ol>
	<ol style="list-style-type: none"><li>2. Tap <b>Power off</b>. The terminal will turn off.</li></ol>

### Restart the terminal

	<ol style="list-style-type: none"><li>1. Press and hold the &lt;Power&gt; button on the right side of the terminal for more than 2 seconds until the menu panel appears.</li></ol>
	<ol style="list-style-type: none"><li>2. Tap <b>Restart</b>. The terminal will turn off and restart.</li></ol>



## Terminal Care and Cleaning

There are a few simple steps to clean and disinfect your terminal. These instructions should be followed to prevent the possibility of damage to your terminal.

### Terminal Sanitization Instructions

**Important:** Never use solvents, detergents or abrasive cleaners.

#### Cleaning


Terminals should only be cleaned using water and a microfiber cloth. Water should not be directly applied to the terminal. Apply water to the microfiber cloth so it is lightly damp and gently wipe down the terminal.

#### Disinfecting

After cleaning the terminal, it can be disinfected using a suitable alcohol-based wipe or a disinfectant applied to a microfiber cloth. Do not apply alcohol or disinfectant directly to the device.

## Troubleshooting

This section lists possible issues that may occur while setting up your Moneris Go Terminal, together with suggested solutions.

Issue	Solution
Touch screen is slow or unresponsive	<ul style="list-style-type: none"> <li>▪ Ensure other electronic devices are away from the terminal.</li> <li>▪ Confirm that the surface of the screen is free from liquids.</li> <li>▪ If there is a protective film over the screen, remove it.</li> <li>▪ Check for any metallic objects touching the screen.</li> <li>▪ Check for any sources of magnetic waves near the device and move them further away.</li> </ul>
Connection issues. How to determine connection mode (4G or Wi-Fi)	<p>Swipe down from the top of the screen to view the status bar.</p> <p>The status bar shows:</p> <ul style="list-style-type: none"> <li>▪ connection mode (4G or Wi-Fi icon),</li> <li>▪ signal strength (if using Wi-Fi, ensure that your network signal is strong)</li> <li>▪ battery charge level (charge the battery as needed)</li> <li>▪ review the <a href="#">IP Checklist</a></li> </ul>
Unable to swipe down further to view the full Android terminal settings (Wi-Fi, Blue-tooth, screen brightness, etc)	<ol style="list-style-type: none"> <li>1. Exit from cloud integration mode.</li> <li>2. At the sign-in screen, swipe down from the top of the screen.</li> </ol>
Terminal begins 60 second countdown when placed in cloud mode	<p>The terminal is trying to communicate using cellular service, but the SIM card is missing or not properly seated.</p> <p>Contact Moneris for assistance.</p>
Wi-Fi issues (IP Checklist)	<p>Refer to firewall rules in the Moneris Go Integration guide Merchant Network Readiness Checklist</p> 



## Merchant and Integrator Support

To obtain support for the Moneris Go solution, follow these directions.

<b>Situation</b>	<b>Directions</b>
You are an integrator developing an integrated solution.	Contact your assigned Client Consultant or Client Integration Specialist.
You are a Merchant configuring a third party application or POS software that connects to Go.	Contact your integration provider for any additional configuration steps.
You are a Merchant facing transaction or payment acceptance issues. Your transactions in Go Portal or Merchant Direct are not synchronized with your POS software.	Contact your integration provider for detailed transaction error information and support. Your integrator may request you contact Moneris for additional troubleshooting.
You are a Merchant facing transaction or payment acceptance issues. Your transactions are being declined by Moneris or the issuer.	Contact Moneris Customer Care toll-free at 1-866-319-7450.
You are a Merchant facing hardware technical issues.	Contact Moneris Customer Care toll-free at 1-866-319-7450.
You are a Merchant with settlement or billing issues.	Contact Moneris Customer Care toll-free at 1-866-319-7450.



NOTICE OF CONFIDENTIALITY. This document contains information that is the proprietary and confidential property of Moneris. The recipient agrees to maintain this information in confidence and not reproduce or otherwise disclose this information.

MONERIS, MONERIS BE PAYMENT READY & Design and MERCHANT DIRECT are registered trade-marks of Moneris Solutions Corporation. All other marks or registered trade-marks are the property of their respective owners.

© 2026 Moneris Solutions Corporation, 3300 Bloor Street West, Toronto, Ontario, M8X 2X2. All Rights Reserved. This document shall not wholly or in part, in any form or by any means, electronic, mechanical, including photocopying, be reproduced or transmitted without the authorized consent of Moneris Solutions Corporation. This document is for informational purposes only. Neither Moneris Solutions Corporation nor any of its affiliates shall be liable for any direct, indirect, incidental, consequential or punitive damages arising out of use of any of the information contained in this document. Neither Moneris Solutions Corporation or any of its affiliates nor any of our or their respective licensors, licensees, service providers or suppliers warrant or make any representation regarding the use or the results of the use of the information, content and materials contained in this document in terms of their correctness, accuracy, reliability or otherwise. Your credit and/or debit card processing is governed by the terms and conditions of your agreement(s) for merchant credit/debit card processing services with Moneris Solutions Corporation. It is your responsibility to ensure that proper card processing procedures are followed at all times. Please refer to the *Moneris Merchant Operating Manual* (available at: [moneris.com/support](https://moneris.com/support)) and the terms and conditions of your applicable agreement(s) for credit/debit processing or other services with Moneris Solutions Corporation for details.

MGo Terminal (Vista) Integrated: GSG - May 2026